JOC101X(B) Series

Rev.A.1.0

DESCRIPTION:

The JOC101X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a silicon planar phototransistor detector in a plastic LSOP4 package. With the robust coplanar double mold structure, JOC101X series provide the most stable isolation feature. The products are widely used in switch mode power supplies, programmable controllers, household appliances, office equipment, etc.





MAIN FEATURES

High isolation 5000 VRMS
CTR flexibility available see order information
DC input with transistor output
Operating temperature range -55°C to 110°C
RoHS & REACH Compliance
MSL class 1
CQC approved
VDE approved
UL approved

ABSOLUTE MAXIMUM RATINGS (Temperature=25°C)

Parameter		Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	1①	A
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	100	mW
Output	Collector-emitter Voltage	V_{CEO}	80	V
	Emitter-collector Voltage	V_{ECO}	6	V
	Collector Current	I_C	50	mA
	Power Dissipation	P_C	150	mW
Total Power Dissipation		P_{tot}	250	mW
Isolation Voltage		V_{iso}	5000②	Vrms
Operating Temperature		T_{opr}	-55~+110	℃
Storage Temperature		T_{stg}	-55~+125	℃

Soldering Temperature	T_{sol}	260	℃

NOTE1: 100μs pulse, 100Hz frequency

NOTE2: AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS (Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	I_F=10mA	-	1.25	1.4	V
			I_F=20mA	-	1.3	1.5	V
	Reverse Current	I_R	V_R=6V	-	-	1	μA
	Terminal Capacitance	C_t	V=0,f=1MHz	-	30	250	pF
Output	Collector-Emitter dark current	I_{CEO}	V_{CE}=20V, I_F=0	-	-	50	nA
	Collector-Emitter breakdown voltage	BV_{CEO}	I_C=0.1mA I_F=0	80	-	-	V
	Emitter-Collector breakdown voltage	BV_{ECO}	I_E=0.1mA I_F=0	6	-	-	V
Transfer Characteristics	Current transfer ratio	CTR	I_F=5mA V_{CE}=5V	50	-	600	%
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_F=10mA I_C= 1mA	-	0.1	0.2	V
	Isolation resistance	R_{IO}	DC500V 40~60%R.H.	$5x10^{10}$	-	-	Ω
	Floating Capacitance	C_{IO}	V=0, f=1MHz	-	0.6	1	pF
	Cut-off Frequency	f_c	V_{CE}=5V, I_C=2mA R_L=100Ω, -3dB	-	80	-	kHz
	Rise Time	t_r	V_{CE}=2V, I_C=2mA R_L=100Ω	-	4	18	μs
	Fall Time	t_f		-	5	18	μs
	Turn On Time	t_{on}		-	8	25	μs
	Turn Off Time	t_{off}		-	5	25	μs

NOTE1: Rank Table of Current Transfer Ratio (Temperature=25°C)

CTR Rank	Min. (%)	Max. (%)	Condition
JOC1010	300	600	I_F=5mA V_{CE}=5V
JOC1015	50	150	
JOC1016	100	300	
JOC1017	80	160	
JOC1018	130	260	
JOC1019	200	400	

JOC1011	60	300	I_F=10mA V_{CE}=5V
JOC1012	63	125	
JOC1013	100	200	
JOC1014	160	320	
JOC1012	22	-	I_F=1mA V_{CE}=5V
JOC1013	34	-	
JOC1014	56	-	

ORDERING AND MARKING INFORMATION

MARKING INFORMATION

JOC : Company Abbr.
101X : Part Number & Rank
VYAWW : LOT NO.

ORDERING INFORMATION

JOC101X(Z)-GV(B)

JOC – Company Abbr.
101X – Rank (0/1/2/3/4/5/6/7/8/9)
Z – Tape and Reel Option (T1/T2)
G – Green
V – VDE Option (V or None)
B – Black

Packing Quantity

Option	Quantity	Quantity – Inner box	Quantity –Outer box
T1	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box =45k Units
T2	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box =45k Units

Characteristics Curves

FIG.1: Forward Current vs. Ambient Temperature

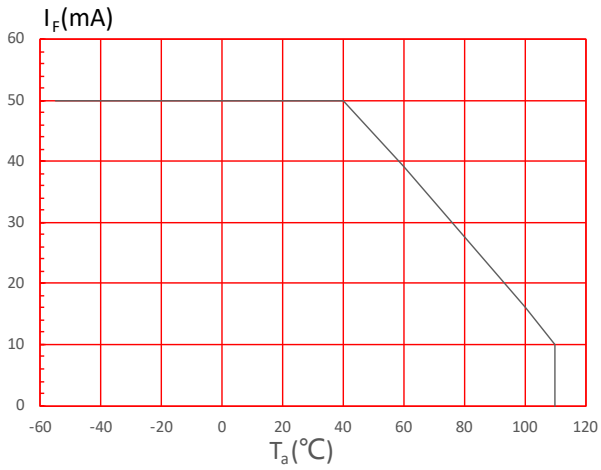

FIG.2: Collector Power Dissipation vs. Ambient Temperature

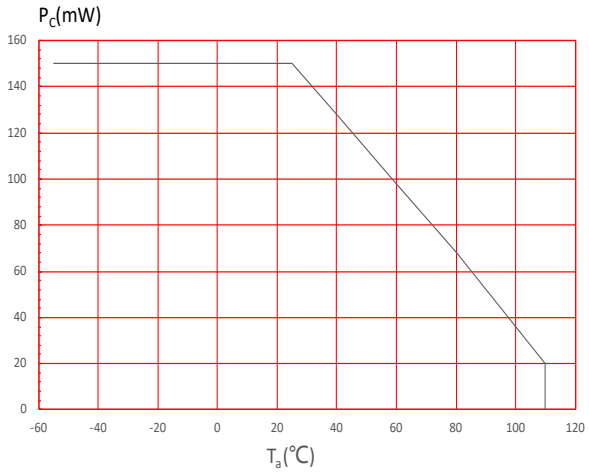

FIG.3: Forward Current vs. Forward Voltage

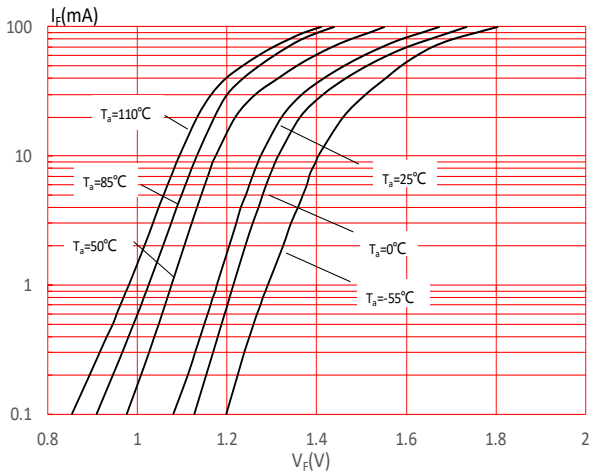

FIG.4: Normalized Collector Dark Current vs. Ambient Temperature

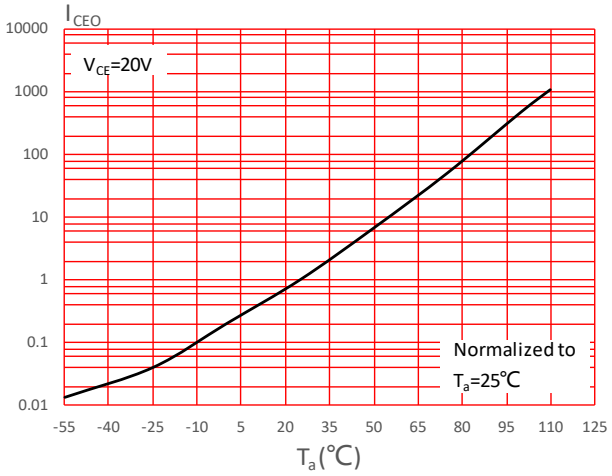

FIG.5: Collector Current vs. Collector-emitter Voltage

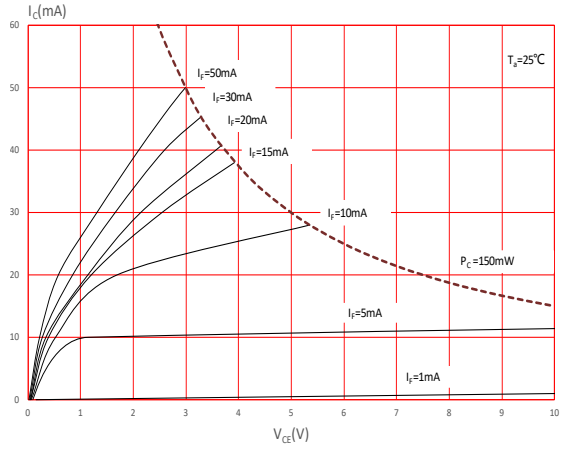

FIG.6: Normalized Current Transfer Ratio vs. Forward Current

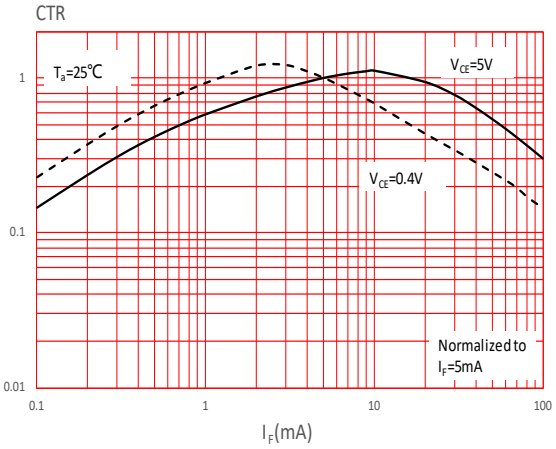

FIG.7: Normalized Current Transfer Ratio vs. Ambient Temperature

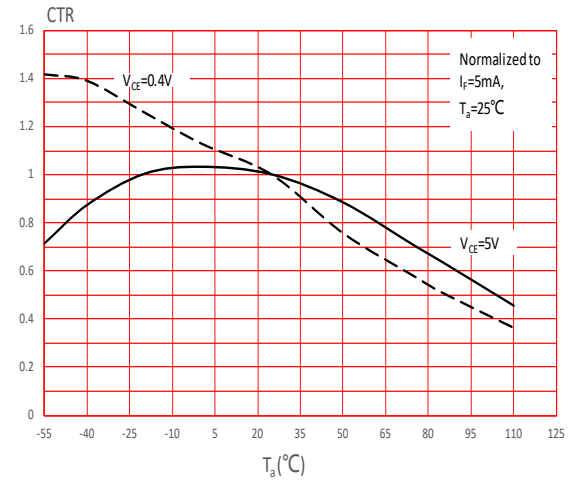

FIG.8: Normalized Collector-emitter Saturation Voltage vs. Ambient Temperature

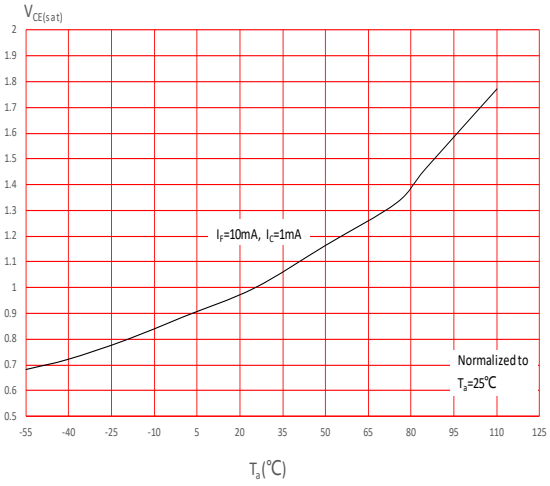

FIG.9: Response Time vs. Load Resistance

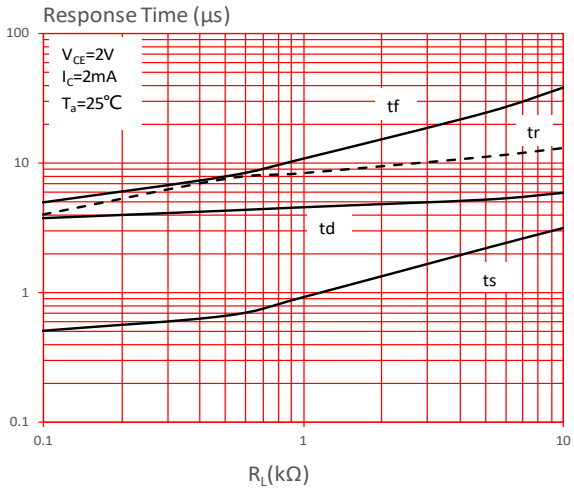

FIG.10: Frequency Response

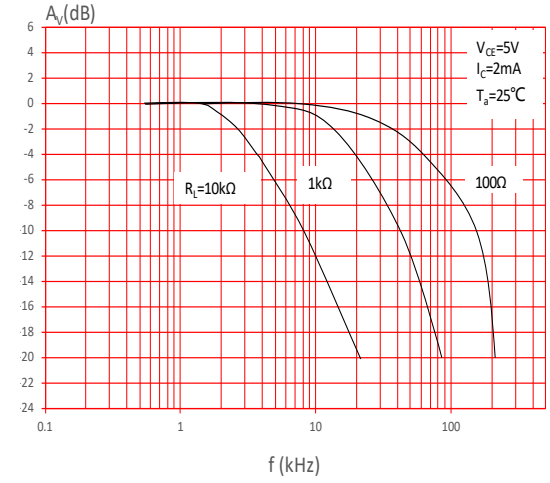

Test Circuits

FIG.11: Test Circuits of Response Time

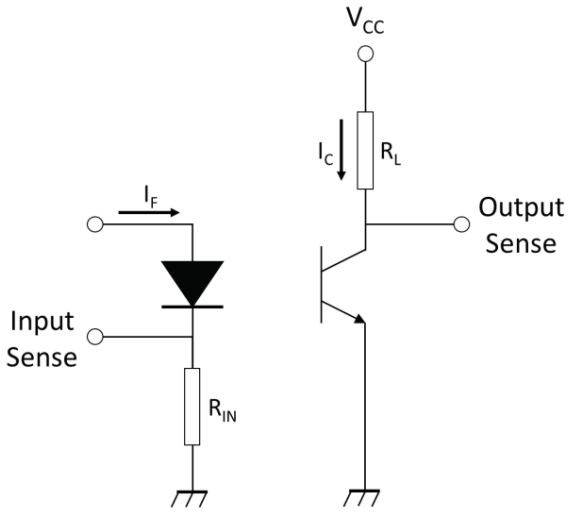

FIG.12: Curves of Response Time

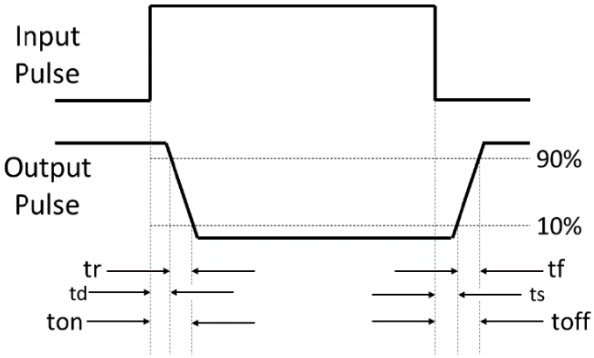

FIG.13: Test Circuits of Frequency Response

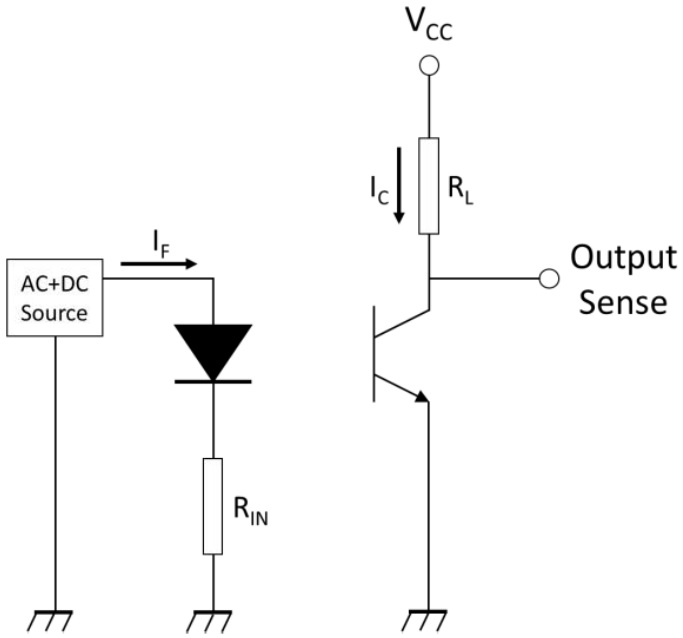

Package Dimension (Unit: mm）

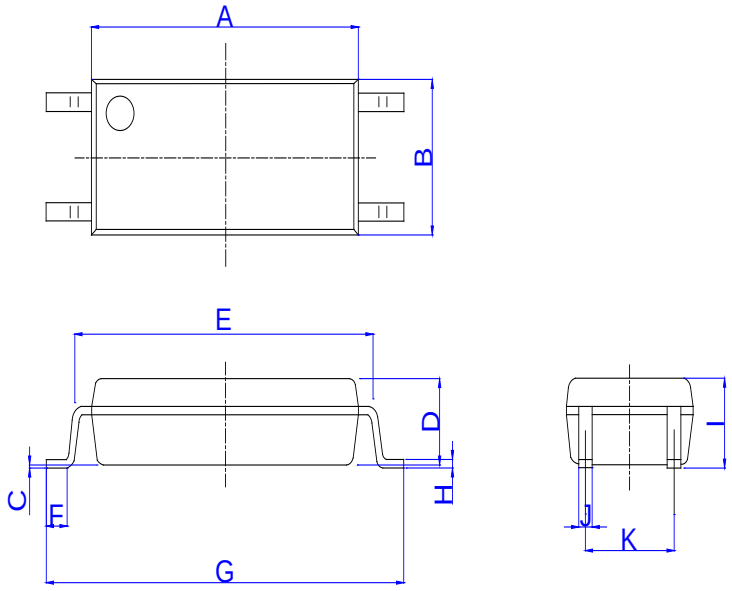

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	7.30		7.92	0.287		0.312
B	3.30		4.14	0.130		0.163
C	0.00		0.20	0.000		0.008
D	1.75		2.35	0.069		0.093
E	8.10		8.95	0.319		0.352
F	0.40		1.00	0.016		0.039
G	9.30		10.50	0.366		0.413
H	0.10		0.30	0.004		0.012
I	1.80		2.40	0.071		0.094
J	0.25		0.55	0.010		0.022
K	2.29		2.79	0.090		0.110

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

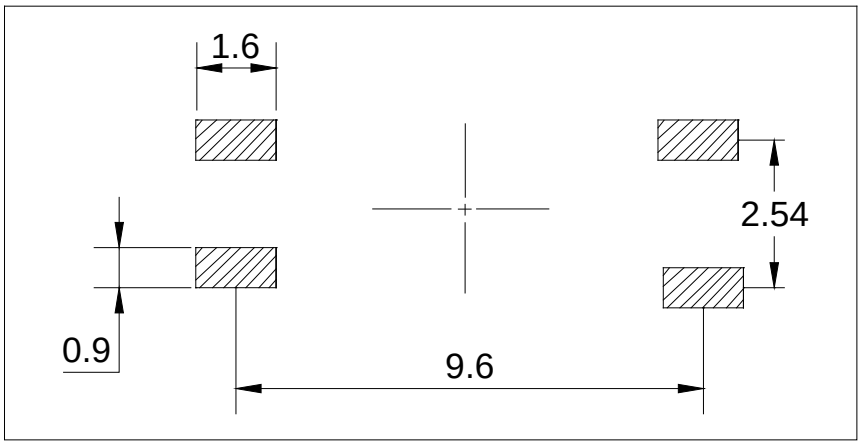

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option T1

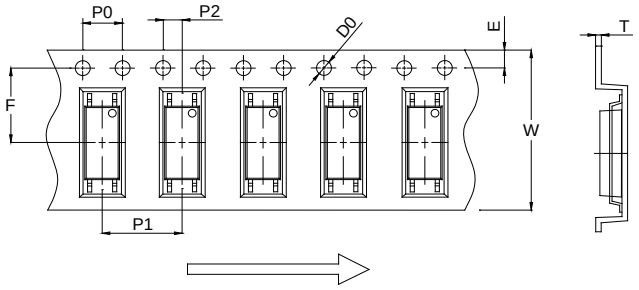

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.45	1.65		0.057	0.065
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.25	0.35	0.45	0.010	0.014	0.018
W	15.70	16.00	16.30	0.618	0.630	0.642

Option T2

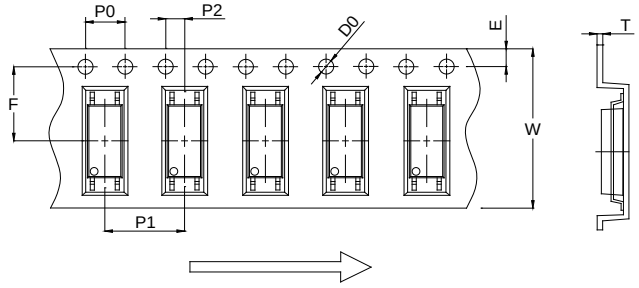

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.45	1.65		0.057	0.065
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.25	0.35	0.45	0.010	0.014	0.018
W	15.70	16.00	16.30	0.618	0.630	0.642

REFLOW INFORMATION

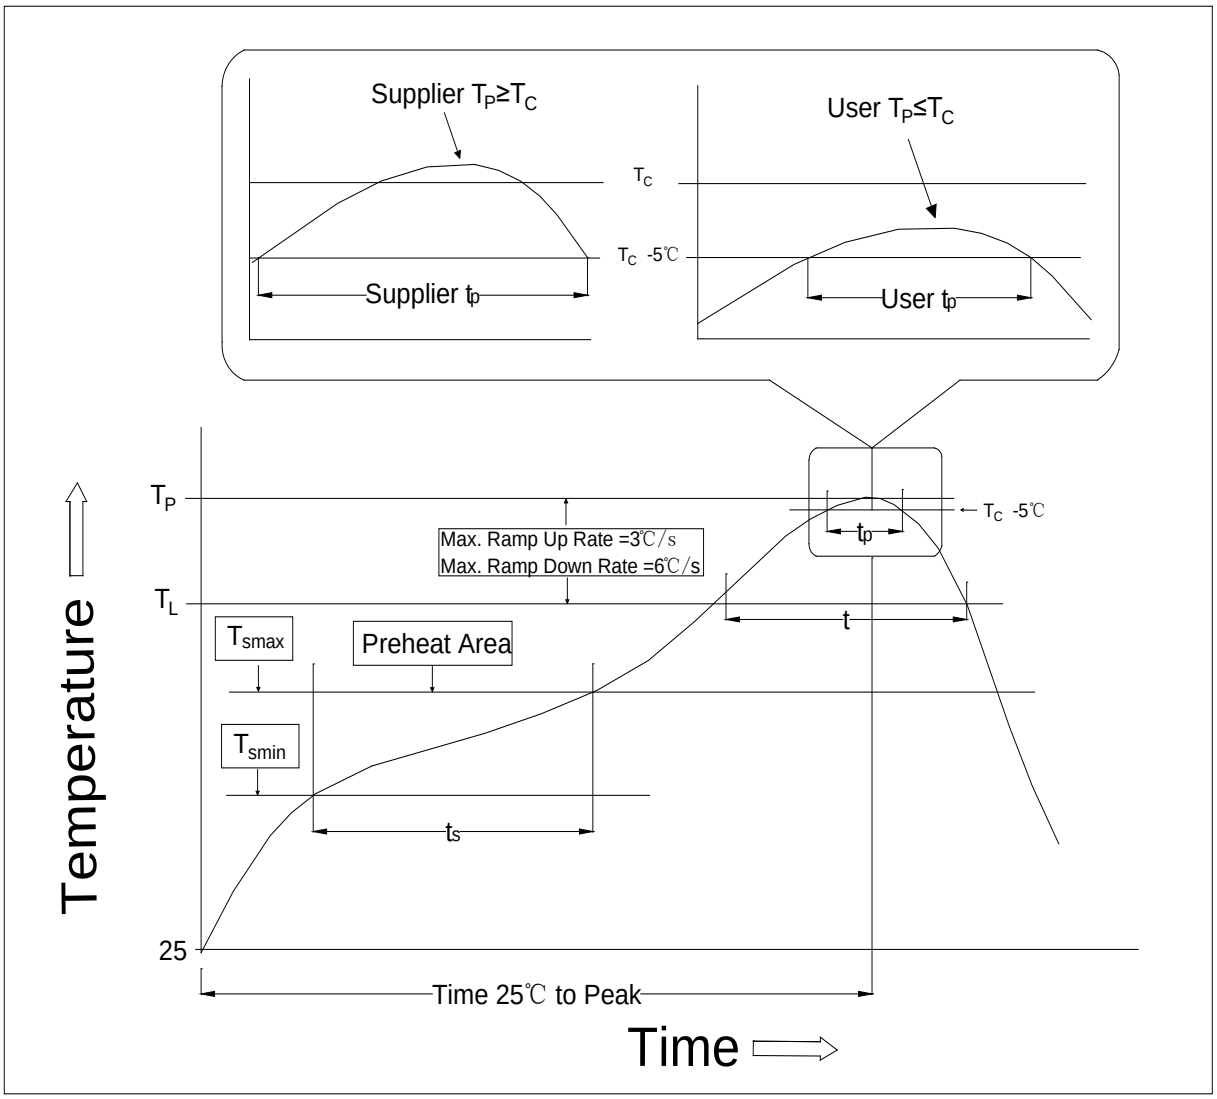

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (Tsmin)	100	150℃
Temperature Max. (Tsmax)	150	200℃
Time (ts) from (Tsmin to Tsmax)	60-120 seconds	60-120 seconds
Ramp-up Rate (tL to tP)	3℃/second max.	3℃/second max.
Liquidus Temperature (TL)	183℃	217℃
Time (tL) Maintained Above (TL)	60-150 seconds	60-150 seconds
Peak Body Package Temperature	235℃+0℃/-5℃	260℃+0℃/-5℃
Time (tP) within 5℃ of 260℃	20 seconds	30 seconds
Ramp-down Rate (TP to TL)	6℃/second max.	6℃/second max.
Time 25℃ to Peak Temperature	6 minutes max.	8 minutes max.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.